



(19)

Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 1 329 999 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

23.07.2003 Bulletin 2003/30

(51) Int Cl.7: H01S 5/14

(21) Application number: 02017446.2

(22) Date of filing: 03.08.2002

(84) Designated Contracting States:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
IE IT LI LU MC NL PT SE SK TR

Designated Extension States:

AL LT LV MK RO SI

• Kallmann, Ulrich

72070 Tuebingen (DE)

• Mueller, Emmerich

71134 Aildingen (DE)

(71) Applicant: Agilent Technologies Inc. (a Delaware Corporation)

Palo Alto, CA 94306-2024 (US)

(74) Representative: Barth, Daniel

c/o Agilent Technologies Deutschland GmbH,

Patentabteilung,

Herrenbergerstrasse 130

71034 Böblingen (DE)

(72) Inventors:


• Steffens, Wolf

71083 Herrenberg (DE)

(54) Wavelength tunable laser with diffractive optical element

(57) A wavelength tunable laser resonator (1) comprises a first resonator end reflector (10) for reflecting a beam (5) of electromagnetic radiation towards a second resonator end reflector (20), said second resonator end reflector (20) for reflecting said beam back towards said first resonator end reflector (10), said first and second resonator end reflector defining a resonator having an optical path with a length, a gain medium (14) for generating and/or amplifying and emitting said beam (5) towards said first and second resonator end reflector, said gain medium (14) being arranged within said resonator, a diffractive optical element (40), which is arranged with-

in said optical path, being adapted to filter a wavelength of said beam (5) of electromagnetic radiation and being designed to focus a portion of said beam (5) comprising said filtered wavelength towards said gain medium (14), wherein at least one of said first or said second resonator end reflector (10, 20) is arranged to be movable with respect to other optical elements within said resonator (1) for increasing or decreasing said length of said optical path of said resonator (1), and wherein said diffractive optical element (40) is arranged to be movable with respect to said other optical elements within said resonator (1) for adapting said filtered wavelength to said increase or decrease of said length of said optical path.

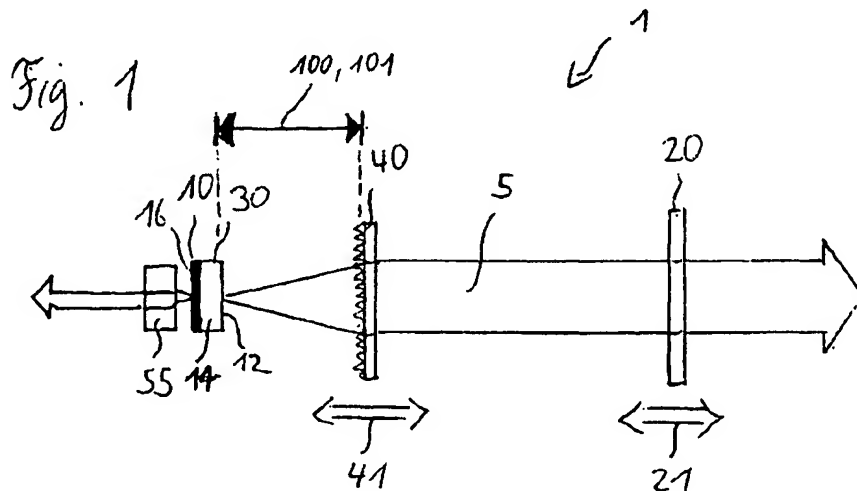

Description

BACKGROUND OF THE INVENTION

[0001] The present invention relates to a wavelength tunable laser with a diffractive optical element.

[0002] Wavelength tunable laser sources are acquiring an increasing importance in industry, particularly in optical communication measurement device industry. A design of a wavelength tunable laser resonator having an external resonator is provided by O.T. Cassidy & Michael Hamp in "Diffractive optical element used in external feedback configuration to tune the wavelength of uncoated Fabry-Perot diode lasers", Journal of Modern Optics, 1999, Vol. 46, No. 7, 1071-1078.

SUMMARY OF THE INVENTION

[0003] It is an object of the present invention to provide an improved wavelength tunable laser resonator. The object is solved by the independent claims. Preferred embodiments are provided by the dependent claims.

[0004] According to embodiments of the present invention, the wavelength tunable laser resonator comprises a first and a second resonator end reflector. Both reflectors are arranged to reflect an incident beam of electromagnetic radiation towards each other, thus defining a resonator, in which resonance modes form as a result of the interfering electromagnetic waves. The resonator end reflectors can be at least one of fully reflective devices, semitransparent mirrors, retro-reflectors, Bragg-reflectors, etc. The optical path defined in length by said first and second resonator end reflectors can be arranged linearly along a line or can be redirected by means of a diffraction grid or a redirection mirror.

[0005] According to embodiments of the present invention any kind of resonator, e.g. a Littmann-resonator (as described in its basics e.g. in "Liu and Littman, Novel geometry for single-mode scanning of tunable lasers, Optical Society of America, 1981"), a Littrow-resonator (as shown e.g. in EP-A-952643), etc. can be realized by the resonator end reflectors and other optical elements, however a linear resonator or a ring resonator, which comprises plane parallel optical paths, are most preferred.

[0006] The laser resonator also comprises a gain medium or element for generating and emitting the beam of electromagnetic radiation. Preferably, the gain element is a semiconductor, having waveguiding properties.

[0007] A diffractive optical element is arranged within the optical path defined by the resonator end reflectors. The diffractive optical element according to embodiments of the invention is designed to focus incident parallel beams towards a focal point. As opposed to a conventional optical lens, the distance between the focal point and the diffractive optical element (DOE) strongly

depends on the wavelength of the incident beams. E.g., for a Fresnel zone plate the focal point distance is approximately proportional to $1/\lambda$, using the paraxial approximation and λ being the wavelength of the electromagnetic radiation.

[0008] As a wavelength filter the diffractive optical element has to introduce wavelength dependent optical losses into the optical system comprising the resonator end reflectors and the waveguide structure of the gain medium. To achieve low optical losses the diffractive optical element has to transform the divergent beam, originating from the waveguide structure, into a beam, which matches with the geometrical conditions given by the resonator reflector. Beams deviating from that condition will partially or completely leave the resonator, which means an additional optical loss. Due to the wavelength dependent imaging properties of the DOE only one specific wavelength fulfills that geometrical condition, determined by the make of the DOE and the distance between DOE and waveguide structure.

[0009] The first and second resonator end reflectors are arranged, such that at least one of the reflectors can be moved with respect to the other optical elements within the resonator for increasing or decreasing the length of said optical path. Performing such a movement, the wavelength of the resonance modes can be tuned. As a result of the tuning movement of at least one of the reflectors, a resonance mode selected by the wavelength filter due to the diffractive optical element shifts in wavelength and leaves the filter function wavelength range provided by the diffractive optical element.

[0010] According to the present invention the diffractive optical element is therefore also provided to be movable with respect to the other optical elements within the resonator. Preferably, the diffractive optical element can be moved with respect to the waveguide structure to change the wavelength filter curve in dependence of the tuned wavelength.

[0011] According to preferred embodiments, the diffractive optical element may comprise at least one of phase modulation structures or amplitude modulation structures. In both cases an incident beam of light is diffracted, such that superposition of electromagnetic radiation transmitted or reflected by the structures leads to constructive or destructive interference. The structures provided with the diffractive optical element are arranged, such that a constructive interference is enabled at substantially the same position in a distance from said optical diffractive element.

[0012] A preferred embodiment of a diffractive optical element is a Fresnel-zone plate. Non-transparent or phase-shifting structures are arranged as concentric circles on a transparent medium alternating with transparent circle structures. The periodicity of the circles increases with distance from the center of the circles. Thus, electromagnetic waves having a given wavelength are diffracted towards, e.g., an axis running through the centre of said concentric circles. The result-

ing diffraction angle is stronger for circle -phase or -amplitude structures being more distant from the center rather than for those ones being arranged near the axis. The diffractive optical element according to the embodiment of a Fresnel-zone plate thus acts as a lens having a focal distance.

[0013] Embodiments of the present invention offer a particular advantage, that a diffractive optical element can be realized as a substantially flat device. It can thus be arranged particularly near to the laser source or a resonator end reflector, while an image or focus distance can be designed to be essentially small. Moreover, the diffractive optical element serves as a wavelength filter and a collimator lens incorporated into one device. In a further embodiment, the wavelength tunable laser resonator comprises a control unit, which is connected each to a drive for moving at least one of the first or second resonator end reflector and a drive for moving the diffractive optical element. In response to a movement of one of the resonator end reflectors for tuning the wavelength of the resonator, the position of the diffractive optical element is changed. This position change is performed with respect to the gain element and waveguide structure position.

[0014] Preferably, a look-up table is provided with the control unit, that attaches resonator end reflector positions to diffractive optical element positions. The look-up table is advantageously established once at an initial tool setup.

[0015] It is also possible to measure a current wavelength by means of a portion of a beam being coupled out by means of a beam splitter. The position of the diffractive optical element can then be adjusted in response to that direct measurement.

[0016] Furthermore an active control mechanism can be set up, where either one resonator end reflector or the DOE is dithered around a central position. Then, part of the laser light can be analyzed with regard to a physical property like optical power or wavelength. From a phase sensitive analysis with respect to the dithering motion a control signal can be derived, which synchronizes the positions of the resonator end reflector and the DOE.

[0017] It is to be understood, that further redirection mirrors or gratings redirecting the optical path within the resonator are to be considered as resonator end reflectors according to the present invention. A movement of these elements can tune the wavelength of a resonator and may thus advantageously be combined with the movable diffractive optical element as a tunable wavelength filter into one resonator.

[0018] According to the present invention further miniaturization of wavelength tunable laser resonators is advantageously fostered.

BRIEF DESCRIPTION OF THE DRAWINGS

[0019] Other objects and many of the attendant ad-

vantages of the present invention will be readily appreciated and become better understood by reference to the following detailed description when considering in connection with the accompanied drawings. Features that are substantially or functionally equal or similar will be referred to with the same reference signs.

Fig. 1 shows a linear laser resonator having a laser diode as a gain element with a reflective back facet and a diffractive optical element according to a first embodiment,

Fig. 2 shows a ring resonator having a diffractive optical element according to a second embodiment,

Fig. 3 shows a linear laser resonator having a laser diode as a gain element, which is antireflection coated on both facets, and a diffractive optical element according to a third embodiment,

Fig. 4 shows a resonator with curved diffractive optical elements.

DETAILED DESCRIPTION OF EMBODIMENTS OF THE INVENTION

[0020] Fig. 1 shows a first embodiment of a wavelength tunable laser resonator according to the present invention. A laser diode chip 30 comprises a gain medium 14 and a back facet 16. Within the gain medium 14, a beam 5 of electromagnetic radiation is generated and emitted through a front surface 12 towards a diffractive optical element 40. The diffractive optical element 40 comprises a Fresnel-zone plate having concentric circles of phase shift modulation structures arranged on a transparent plate. A diffractive Fresnel lens such defined comprises a focus distance 100, which depends on a wavelength of light being transmitted through the lens.

[0021] The diffractive optical element 40 is arranged in a distance towards the laser source 30, which is substantially equal to the focus distance 100. As a result a portion of the beam 5 substantially having a specific wavelength corresponding to the focus distance, which is equal to the distance laser source - diffractive optical element, is collimated into a bundle of substantially parallel light rays traversing to a partially-reflective second resonator end reflector 20.

[0022] Beam 5 is substantially reflected back from the second resonator end reflector 20 and focused into an distance 101 towards the laser source 30 by the diffractive optical element 40. Portions of beam 5 not corresponding to the specific wavelength leave the resonator due to not resulting in bundles of parallel light rays. The diffractive optical element 40 acts as a wavelength filter. With respect to the specific wavelength, the image distance 101 is identical to the focus distance 100 in this

embodiment.

[0023] The back facet 16 of the laser source 30 represents a first resonator end reflector 10 thus defining the optical path length of the resonator 1. As a result, resonance modes form within the resonator 1 having wavelengths, which depend on the optical path length. The distance between the gain medium 14 of the laser source 30 and the diffractive optical element 40 is chosen such as to select one of the modes with said specific wavelength filter. The back facet 16 is partially reflective as well, such that a portion of beam 5 can be outcoupled here as well. A lens 55 serves for collimating the out-coupled beam.

[0024] The second resonator end reflector 20 is movable in a first direction 21 to or from the other optical elements within the resonator 1, in particular the back facet 16, for tuning the wavelength of the resonance modes. When these wavelengths shift as a result of tuning, the resonance mode selected by the wavelength filter, i.e. the diffractive optical element 40, leaves the wavelength filter function and would disappear due to being filtered out.

[0025] The diffractive optical element 40 is provided with mobility into a second direction 41. Thus a movement of diffractive optical element 40 can be performed in order to bring it into a distance towards the laser source 30, that corresponds to a focus distance 100 of the diffractive optical element 40 valid for the shifted wavelength. Thus a movement of diffractive optical element 40 provides a shift of the wavelength filter function, such that the resonator wavelength tuning can be corrected for. As an advantageous result, mode hops can be avoided while performing wavelength tuning.

[0026] Fig. 2 shows a second embodiment of the present invention. A ring resonator is defined by first and second resonator end reflectors 10, 10', 20, 20', wherein a beam 5 of electromagnetic radiation is generated and/or amplified by means of the gain medium 14 and emitted into the ring-like optical path of beam 5. A diffractive optical element 40 is arranged within the optical path of the first direction and a collimating optical lens 55 is arranged within the optical path of the second direction. The optical path length can be increased by moving the set of first resonator end reflectors 10, 10' into a direction 11. The diffractive optical element 40 comprising the same features as in the first embodiment is arranged being movable in direction 41 for adjusting the filter wavelength in response to the wavelength tuning.

[0027] Fig. 3 shows a third embodiment of the present invention. A linear resonator is displayed similar to Fig. 1. However, the diffractive optical element 40 and the second resonator end reflector 20 are represented by the same optical device, the diffractive optical element 40 thus being reflective rather than transmissive in this embodiment. In this embodiment, the image distance 101 is approximately twice the focus distance 100 of the DOE for geometrical reasons.

[0028] Since the image distance 101 of the diffractive

optical element as compared with the distance towards the laser source provides the filtered wavelength range, the first resonator end reflector 10 is provided to be movable in order to give an additional option to tune the resonator 1. The laser source thus does not have a reflective back facet in this embodiment.

[0029] Fig. 4 shows further advantageous embodiments of diffractive optical elements 40. Both elements shown are curved in order to either lengthen or shorten a focus or image distance with respect to a Fresnel-zone plate having the same phase structure dimensions but which are arranged on a plane plate.

Claims

1. A wavelength tunable laser resonator comprising:

a first resonator end reflector (10) for reflecting a beam (5) of electromagnetic radiation towards a second resonator end reflector (20),

said second resonator end reflector (20) for reflecting said beam (5) back towards said first resonator end reflector (10), said first (10) and second resonator end reflector (20) defining a resonator (1) having an optical path with a length,

a gain medium (14) for emitting said beam (5) towards said first (10) and second resonator end reflector (20), said gain medium (14) being arranged within said resonator (1),

a diffractive optical element (40) arranged within said optical path and being adapted for filtering said beam (5) in wavelength and focusing at least a portion of said wavelength-filtered beam (5) towards said gain medium (14),

wherein at least one of said first (10) or said second resonator end reflector (20) is arranged to be movable with respect to other optical elements within said resonator (1) for increasing or decreasing said length of said optical path of said resonator (1), and wherein said diffractive optical element (40) is arranged to be movable with respect to said other optical elements within said resonator (1) for adapting said filtered wavelength to said increase or decrease of said length of said optical path.

2. The resonator of claim 1, wherein said gain medium (14) comprises said first resonator end reflector (10) being arranged as a back facet (16) of said gain medium (14), and said gain medium (14) having a front surface (12), through which said beam (5) is emitted towards said second resonator end reflector (20), and

wherein said diffractive optical element (40) is designed to transmit said beam (5) being diffracted.

3. The resonator according to claim 1,
wherein said first resonator end reflector (10) is arranged to be movable with respect to said other optical elements, and
said diffractive optical element (40) and said second resonator end reflector (20) denote the same optical element, which is arranged to be movable with respect to said other optical elements. 5 10
4. The resonator according to claim 1 or any one of the above claims,
further comprising a control unit and a drive, each for moving said diffractive optical element (40) and said at least one of said first (10) or second resonator end reflector (20) for adjusting the position of said diffractive optical element (40) within said optical path in response to an increase or decrease of said length of said optical path. 15 20
5. The resonator according to claim 1 or any one of the above claims,
wherein said first and said second resonator end reflectors are provided as retro-reflectors such that an optical path defining a ring resonator is formed. 25
6. The resonator according to claim 5,
further comprising an optical diode for selecting one beam direction to reduce or avoid spatial hole burning effects within the gain medium (14). 30
7. The resonator according to claim 1 or any one of the above claims,
wherein said diffractive optical element (40) comprises a phase modulation structure for diffracting said beam (5). 35
8. The resonator according to claim 1 or any one of the above claims,
wherein said diffractive optical element (40) comprises an amplitude modulation structure for diffracting said beam (5). 40 45
9. The resonator according to claim 1 or any one of the above claims,
wherein said diffractive optical element (40) comprises a Fresnel zone plate. 50
10. The resonator according to claim 1 or any one of the above claims,
wherein said diffractive optical element (40) comprises a refractive element for additionally refracting electromagnetic radiation diffracted by said diffractive optical element (40). 55
11. The resonator according to claim 1 or any one of

the above claims,

wherein said diffractive optical element (40) comprises a diffractive structure having a concave or convex spatial structure for providing a particularly short or long focal distance.

12. The resonator according to claim 1 or any one of the above claims,
wherein at least said first resonator end reflector (10), said gain medium (14), said diffractive optical element (40) and said second resonator end reflector (20) are arranged in a spatially linear resonator substantially within a line without angular redirection of said optical path of said beam (5).
13. Method for tuning a wavelength of a wavelength tunable laser resonator (1) comprising a first (10) and second resonator end reflector (20), a diffractive optical element (40) and a gain medium (14) according to any one of the above claims, comprising the steps of:

emitting a beam (5) of electromagnetic radiation by said gain medium (14) within said resonator (1),

forming a set of resonance modes of said beam (5) within said resonator (1) defined in length by said first (10) and second resonator end reflectors (20),

selecting one resonance mode of said beam (5), said mode having a wavelength,

focussing said resonance mode of said beam towards said gain medium (14) using said diffractive optical element (40) having an image distance to said gain medium (14) with respect to said wavelength,

moving one of the first (10) or the second resonator end reflector (20) for increasing or decreasing the optical path length of said resonator (1), for tuning the wavelength of said resonance mode of said beam (5),

adjusting the position of said diffractive optical element (40) in response to said wavelength tuning to correct for a different image distance of said diffractive optical element (40) with respect to said tuned wavelength of said resonance mode.

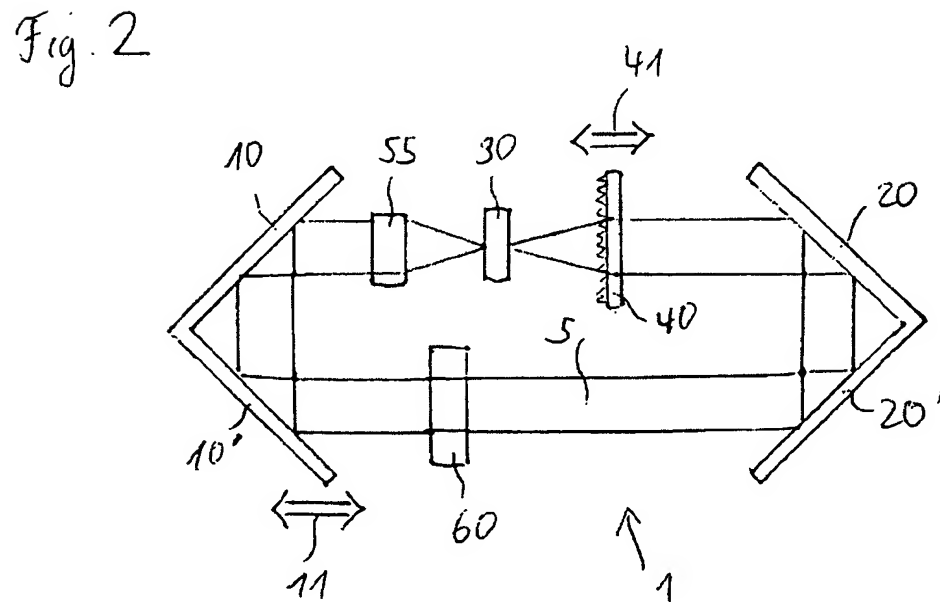
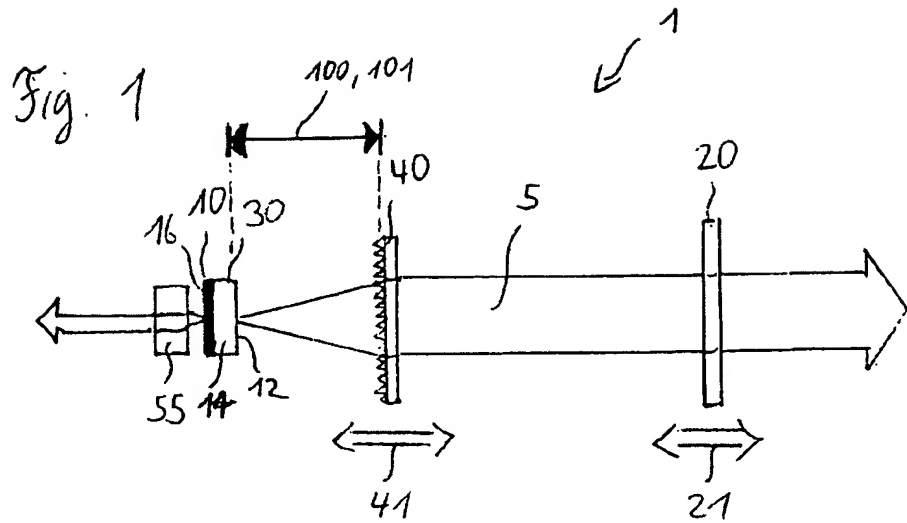


Fig. 3


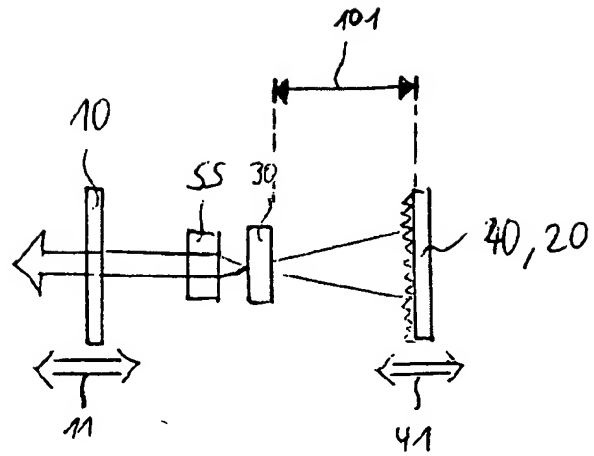


Fig. 4



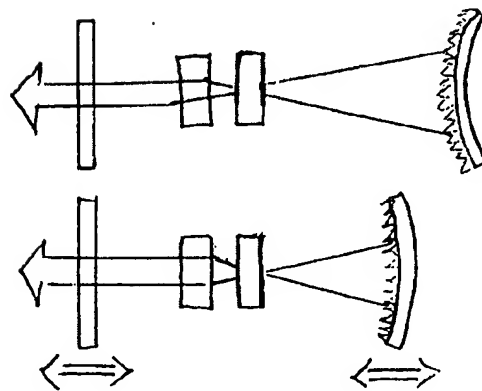

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 02 01 7446

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
Y	CASSIDY D T ET AL: "Diffraction optical element used in an external feedback configuration to tune the wavelength of uncoated Fabry-Perot diode lasers" JOURNAL OF MODERN OPTICS, 15 JUNE 1999, TAYLOR & FRANCIS, UK, vol. 46, no. 7, pages 1071-1078, XP009004345 ISSN: 0950-0340 * page 1072 - page 1077; figures 1B,2 *	1-13	H01S5/14
Y	LABACHELERIE M DE ET AL: "MODE-HOP SUPPRESSION OF LITTROW GRATING-TUNED LASERS" APPLIED OPTICS, OPTICAL SOCIETY OF AMERICA, WASHINGTON, US, vol. 32, no. 3, 20 January 1993 (1993-01-20), pages 269-274, XP000334482 ISSN: 0003-6935 * page 269; figure 1 *	1-13	
Y	PATENT ABSTRACTS OF JAPAN vol. 015, no. 315 (E-1099), 12 August 1991 (1991-08-12) -& JP 03 116992 A (TOSHIBA CORP), 17 May 1991 (1991-05-17) * abstract; figure 1 *	1,2	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			H01S G02B
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 5 February 2003	Examiner Marani, R
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X: particularly relevant if taken alone Y: particularly relevant if combined with another document of the same category A: technological background O: non-written disclosure P: intermediate document</p> <p>T: theory or principle underlying the invention E: earlier patent document, but published on, or after the filing date D: document cited in the application L: document cited for other reasons &: member of the same patent family, corresponding document</p>			

EPO FORM 1503 03 02 (P04C01)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 02 01 7446

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
Y	WOODWORTH SEAN C ET AL: "Using diffractive optics for tuning custom-designed broadband diode lasers" CONFERENCE ON LASERS AND ELECTRO-OPTICS (CLEO 2002); LONG BEACH, CA, UNITED STATES MAY 19-24 2002, 2002, pages 222-223, XP002229280 Pacif Rim Conf Lasers Electro Opt CLEO Tech Dig; Pacific Rim Conference on Lasers and Electro-Optics, CLEO - Technical Digest 2002 * page 222; figure 2 * ---	1-7, 10-13	TECHNICAL FIELDS SEARCHED (Int.Cl.7)
Y	EP 0 762 573 A (ANRITSU CORP) 12 March 1997 (1997-03-12) * abstract; figure 1 * * page 6, line 32-55 * ---	3,4	
Y	US 5 651 018 A (LANG ROBERT J ET AL) 22 July 1997 (1997-07-22) * column 15, line 29 - column 16, line 18; figures 31,32 * ---	5,6	
Y	STONE T ET AL: "HYBRID DIFFRACTIVE-REFRACTIVE LENSES AND ACHROMATS" APPLIED OPTICS, OPTICAL SOCIETY OF AMERICA, WASHINGTON, US, vol. 27, no. 14, July 1988 (1988-07), pages 2960-2971, XP002932475 ISSN: 0003-6935 * abstract; figure 1 * ---	10	
Y	DE 40 05 247 A (JENOPTIK JENA GMBH) 6 December 1990 (1990-12-06) * abstract; figure 1 * ---	11	
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 5 February 2003	Examiner Marani, R
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03 02 (P04C01)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 02 01 7446

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
Y	LEVIN L: "Mode-hop-free electro-optically tuned diode laser" OPTICS LETTERS, 15 FEB. 2002, OPT. SOC. AMERICA, USA, vol. 27, no. 4, pages 237-239, XP001122039 ISSN: 0146-9592 * page 237 - page 238; figure 1 *	1,3	
A	--- SAMUELS U ET AL: "Precise wavelength tuning of a dye laser using an active diffractive optical element" OPTICS AND LASER TECHNOLOGY, ELSEVIER SCIENCE PUBLISHERS BV., AMSTERDAM, NL, vol. 28, no. 6, 1 September 1996 (1996-09-01), pages 423-429, XP004026277 ISSN: 0030-3992 the whole document	1-4	
A	--- PATENT ABSTRACTS OF JAPAN vol. 016, no. 288 (E-1223), 25 June 1992 (1992-06-25) & JP 04 072781 A (MITSUBISHI ELECTRIC CORP), 6 March 1992 (1992-03-06) * abstract; figure 1 *	1-3	
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 5 February 2003	Examiner Marani, R
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons</p> <p>& : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03 02 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 02 01 7446

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

05-02-2003

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
JP 03116992	A	17-05-1991	NONE	
EP 0762573	A	12-03-1997	JP 9064439 A	07-03-1997
			DE 69620962 D1	06-06-2002
			DE 69620962 T2	14-11-2002
			EP 0762573 A1	12-03-1997
			US 6141360 A	31-10-2000
US 5651018	A	22-07-1997	US 5537432 A	16-07-1996
			US 5392308 A	21-02-1995
			US 5914978 A	22-06-1999
			US 5592503 A	07-01-1997
			US 5499261 A	12-03-1996
			US 5602864 A	11-02-1997
			US RE37354 E1	04-09-2001
			US RE37051 E1	13-02-2001
			US 5864574 A	26-01-1999
			US 5696779 A	09-12-1997
			US 5703897 A	30-12-1997
			US 5894492 A	13-04-1999
DE 4005247	A	06-12-1990	DD 294619 A7	10-10-1991
			DE 4005247 A1	06-12-1990
			FR 2647974 A1	07-12-1990
JP 04072781	A	06-03-1992	NONE	

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82